



Liebert®

S600

10KVA-20KVA

Efficient & Robust UPS
for Critical Applications



In today's dynamic world, it is not enough for enterprises to have basic power protection. With digital trends constantly emerging and transforming the way you do business, business continuity is all the more vital. You simply cannot afford downtime in your critical system or waste time recovering these systems after a disruption. What you need is a robust, high-speed, reliable UPS system, which offers perennial, round-the-clock protection to diverse application needs.

Our Solution

The Liebert® S600™ is a fully-digital, highly reliable, double conversion UPS solution that delivers clean and consistent power. This highly efficient solution is ideal for various deployments, whether it's IT racks, network closets, automation control systems, and precision instruments to small-sized control rooms among other edge applications.

- Cutting-edge design enables seamless integration into various ecosystems
- Tailored for global deployment in a low carbon, compact footprint

The ultimate level of engineering and dynamics that have gone beyond the development of this next-generation, innovative product facilitate top-notch availability and excellent performance at a low cost of ownership, giving you ultimate peace of mind.

Application Areas

- Edge Networks
- Data Centers
- Analytical instruments
- Server Farms
- Workstations
- Telecom

Inbuilt isolation transformer

Unity power factor

Efficiency >91% with inbuilt transformer

Higher operating temp-
0° to 50°

Settable battery options



10-20kVA

Operates in a parallel configuration upto 4 nos

LI-ion battery compatible


Graphical touch screen system LCD display provides user-friendly operating interface

Integrated SNMP for monitoring



The Most Efficient UPS

Liebert® S600™ offers best-in-class efficiency of up to 91% over a wide range of load conditions, resulting in significant OPEX cost savings. S600's integrated Smart Sleep technology in ECO mode provides a superlative efficiency of up to 94%.

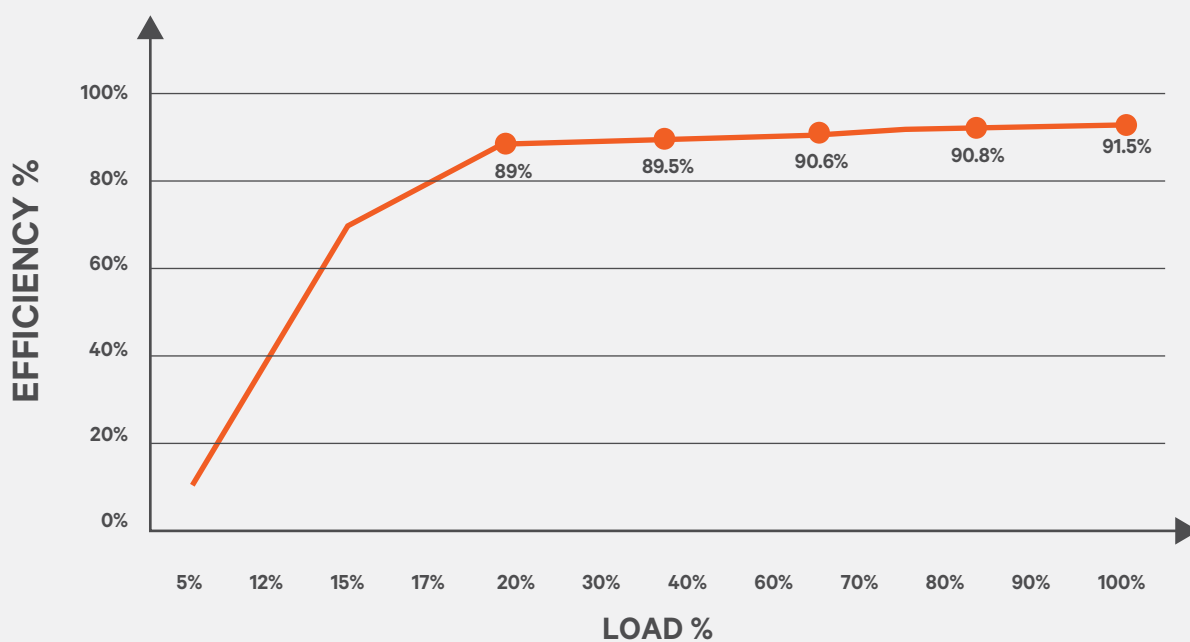

Available in different wattage variations, Liebert® S600 is ideal in edge of networks, light industrial applications and data centers, blending easily into any virtualized environment and providing comprehensive power protection at lower operating costs.

Reliability in a Compact Footprint:

- Fully-digital control with high output voltage precision.
- Manages all the nine power problems including sagging, spikes, and fluctuations.
- Built-in Ethernet port includes compatibility with intelligent cards (SIC card, RDU_SIC cards, etc.,) with browser support.
- Built-in-power charger for fast charging reduces battery charging time.
- Prolonged backup time through cascaded connection.

High Availability

Inbuilt isolation transformer

Protects UPS and load from high voltage fluctuations.

Early Warning of UPS System

Status: Multiple audible and visual alarms immediately alert you to critical issues.

Periodic Battery Testing

Provides automatic and manual self-diagnostic battery testing for peace of mind.

Power-Factor Correction

Prevents noise, harmonics, and distortion from being passed on to connected loads or from being fed back to the utility.

Lightning and Surge Protection

The transient voltage surge suppression circuitry inside the Liebert® S600 provides additional protection for the connected equipment.

Wide Input Voltage Window

Prolongs battery life by allowing the UPS to maximize the use of utility power before transferring to the battery when the input voltage exceeds the specified limits.



Technical Specifications

Rating		10KVA	20KVA
System parameter	Configuration	3in-1out	3in-1out 3in-3out
	Rated voltage	400vac 3-phase,4 wire	400Vac 3-Phase,4 wire
	Volatge Range	176 -288VAC at 100% load; 100VAC - 288VAC at 50% load	
Input	Rated Frequency	50Hz/60Hz	
	Frequency Range	40Hz ~ 70Hz	
	Power factor	>=0.95 at full load	
	Input phase reversal correction	Yes	No
Output	Rated power	10KVA/10kW	20KVA/20kW
	Voltage	220/230/240VAC (single phase)	Three Phase 380/400/415 Vac
	Frequency synchronization range	Rated frequency±3Hz. Configurable range: ±0.5Hz ~ ±5Hz	
	Rated Power Factor	Unity	
	Crest Factor	3:1	
	Voltage harmonic distortion	< 2% (linear load)	
	Voltage Regulation	2%	1%
	Dynamic response recovery time	60ms	40ms
	Isolation transformer	Inbuilt at UPS output Inbuilt at UPS input	
	Inverter Overload Capability the utility mode	At 25°C: 105% ~ 125%- 5min; 125% ~ 150%-1min; 150%- more than 200ms	
	Inverter Overload Capability the battery mode	At 25°C :105% ~125%-60~ 30 s >125%- more than 200ms	
Bypass	Bypass Voltage range	Upper limit: +10%, +15% or +20%; default: +20% Lower limit: -10%, -20%, -30% or -40%; default: -40%	
	Seprate bypass	Yes	
	Manual bypass	Inbuilt	
Efficiency	ECO Mode	> 94%	
	Online mode (AC-AC)	> 91%	
	Inverter Efficiency(DC-AC)	88%	88% >94%
Battery	Type	Sealed, lead-acid,Tubular,LI-ION	
	No.'s of Batteries	12 ⁽¹⁾ , 16, 20; 16 by default	24 ⁽¹⁾ , 32, 40; 32 by default
	Battery Fuse disconnecter	Inbuilt	
	Battery charging capacity	8A	13A
	Mains - Battery	0ms	
Transfer Time	Inverter- Bypass	Synchronous transfer: ≤0ms	
		Asynchronous transfer (default): ≤20ms	
UPS Parallel Numbers		4	
Noise		<65db	
Panel display mode		Graphical LCD display	
Ambient Conditions	Operating temperature	0°C ~ 50°C ⁽²⁾	
	Storage temperature	-40°C ~ +70°C (battery excluded); -25°C ~ +55°C (battery included)	
	Relative humidity	5%RH ~ 95%RH, non-condensing	
	Altitude	≤3000m; derating when higher than 3000m	
Mechanical parameter	W*D*H (mm)	550 X 620 X 700	550 X 620 X700 550X620X700
	Weight (Kg)	138	158 170
	Ventilation	Forced -air cooled	
	Ingress protection	IP20	
	Color	Powder coated Black Texture finish	
	Cable entry	Rear bottom	
Network Management	Smart RS232/USB	Supports Windows 2000/2003/ and MAC XP/Vista/2008,Windows 7,Linux,unix and MAC	
	SNMP	Inbuilt for web monitoring	
	Optional SNMP	Power management from SNMP manager and web browser	
	Management software	Site monitor	
	Modbus	Inbuilt via multifunction port	

Note : (1) UPS power will derate to 70% of the total capacity

(2) UPS power will derate to 80% at 40deg, 70% at 50deg

*conditions apply



[Vertiv.com/en-in](https://www.vertiv.com/en-in) | E-mail : marketing.india@vertiv.com | Toll free : 1-800-2096070

Vertiv Energy Private Limited | Plot C-20, Rd No.19, Wagle Ind Estate, Thane (W), 400604. India

© 2019 Vertiv Co. All rights reserved. Vertiv, and the Vertiv logo trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.